




Serie **FIDO..SFER**

Articolo **6166**

Full bore ball valve for gas for riser pipe, with sealable cap, female threaded and PE connection, with fitting for protection steel pipe.

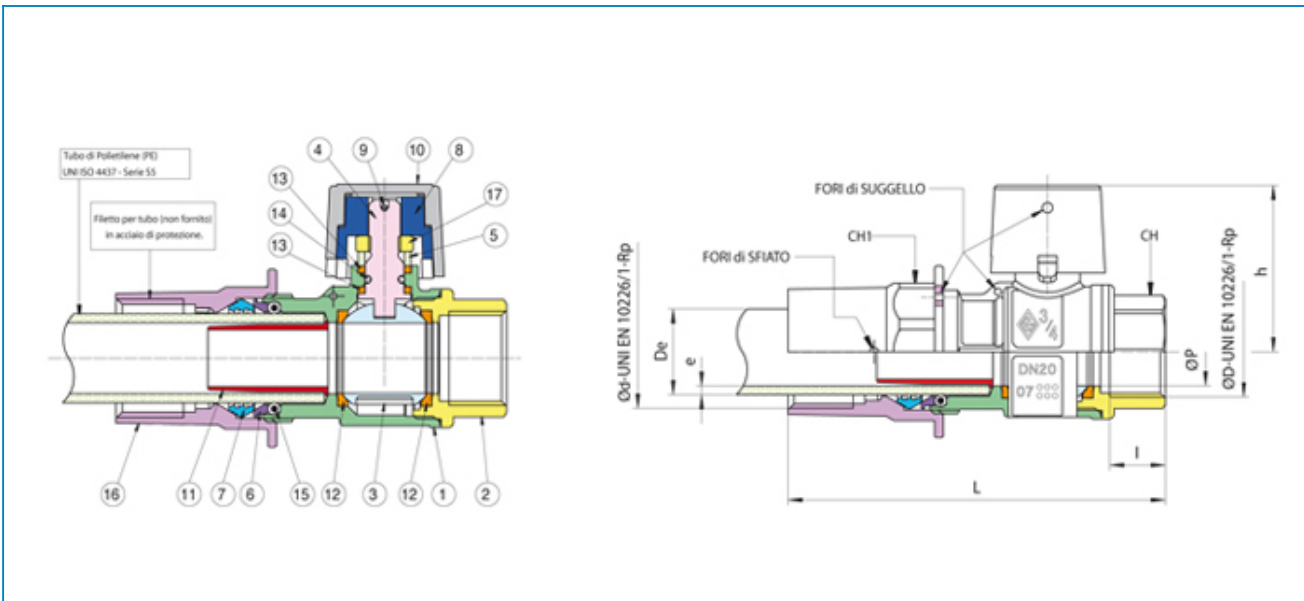

| POS. | PART NAME | MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL | N°P |
|------|----------------------|---|-----|
| 1 | BODY | OTTONE CW617N UNI EN 12165 | 1 |
| 2 | END CONNECTION | OTTONE CW617N UNI EN 12165 | 1 |
| 3 | BALL | OTTONE CW617N UNI EN 12165 | 1 |
| 4 | STEM | OTTONE CW614N UNI EN 12164 | 1 |
| 5 | PACKING GLAND | OTTONE CW614N UNI EN 12164 | 1 |
| 6 | PACKING GLAND | OTTONE CW614N UNI EN 12164 | 1 |
| 7 | ANTIUNTHREADING RING | OTTONE CW614N UNI EN 12164 | 1 |
| 8 | LOCKABLE CAP | ZAMA/G Zn A14 Alloy UNI 3717 | 1 |
| 9 | PIN | ACCIAIO INOX AISI 303 | 1 |
| 10 | CAP | ABS | 1 |
| 11 | SUPPORT | OTTONE CW614N UNI EN 12164 | 1 |
| 12 | BALL SEAT | P.T.F.E | 2 |
| 13 | ANTIFRICTION SEAT | P.T.F.E | 2 |
| 14 | O-RING | NBR | 1 |
| 15 | O-RING | NBR | 1 |
| 16 | NUT | OTTONE CW617N UNI EN 12165 | 1 |
| 17 | NUT | OTTONE CW617N UNI EN 12165 | 1 |

| ØD x De | DN | Ød UNI EN 10226-1 Rp | BOX | MASTER BOX | CODICE CODE | ØP | I | De | e | L | h | Ch | ChI | MOP | Kg |
|------------|----|----------------------|-----|------------|-------------|----|------|----|-----|-------|------|----|-----|-----|------|
| 3/4" x 25 | 20 | 1" | 15 | 30 | 6166050025 | 20 | 16,3 | 25 | 2,5 | 110,5 | 49 | 31 | 40 | 5 | 0,54 |
| 1" x 32 | 25 | 1"1/4 | 10 | 20 | 6166060032 | 25 | 19,1 | 32 | 3 | 128 | 53 | 38 | 50 | 5 | 0,82 |
| 1"1/4 x 40 | 32 | 1"1/2 | 8 | 16 | 6166070040 | 32 | 21,4 | 40 | 3,7 | 147,5 | 65,5 | 48 | 60 | 5 | 1,27 |
| 1"1/2 x 50 | 40 | 2" | 6 | 12 | 6166080050 | 40 | 21,4 | 50 | 4,6 | 167 | 71,5 | 54 | 70 | 5 | 1,87 |
| 2" x 63 | 50 | 2"1/2 | 2 | 4 | 6166100063 | 50 | 25,7 | 63 | 5,8 | 94,5 | 81 | 67 | 85 | 5 | 2,53 |

Limiti di temperatura: -20°C +60°C - Temperature range: -20°C +60°C.